


Gas warmer Passat II

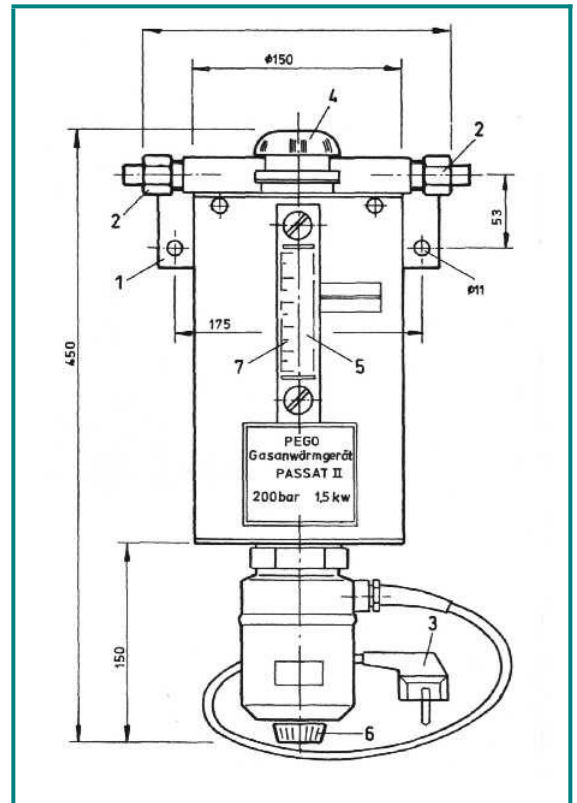

Model	Gas	Inlet pressure P1	Flow Q1	Heating Power	In & outlet connections	Voltage	Max. heating fluid
Passat II	NF, NC	max. 200 bar	max. 200m³/h	35-80°C/1,5kW	G½ DIN EN 560	230 V	3,25l

With the gas warmer Passat II, non-aggressive and non-flammable gases pre-heated. Gas can at low ambient temperatures and high flow rates can cause the piping and regulator to ice up.

This is prevented by the Passat II. Materials in contact with medium: Aluminium, copper and brass.