


Safety valve for Acetylene Asi - 35

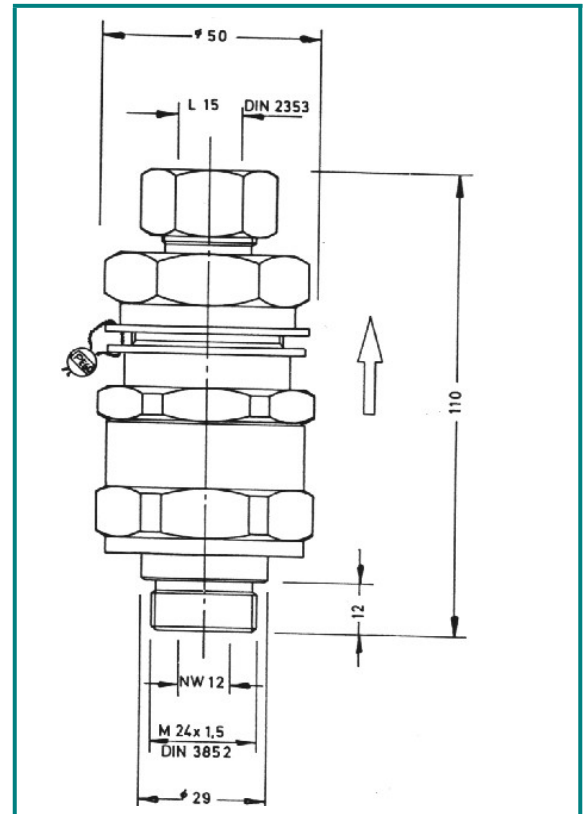

Model	Gas	Inlet pressure P1	Release pressure	Flow rate	Inlet connection	Outlet connection
ASI 35	Acetylene	max. 1.5 bar	ca. 2.4 bar	ca. 35 m³/h Air	M 24 x 1,5 DIN 3852	L15 DIN 22353

The safety valve Asi-35 is for intermediate pressure lines that are fed from Acetylene cylinder batteries.

The safety valve Asi-35 is piston actuated.

Safety Registration No: **ASI-35: 06D – SV 58 1 77**